




STARK®

STRONG, STRONGER, STARK



STARK -SNOW BLADE

- An extremely durable work tool thanks to its robust construction and high quality components
- Suitable for year-round use

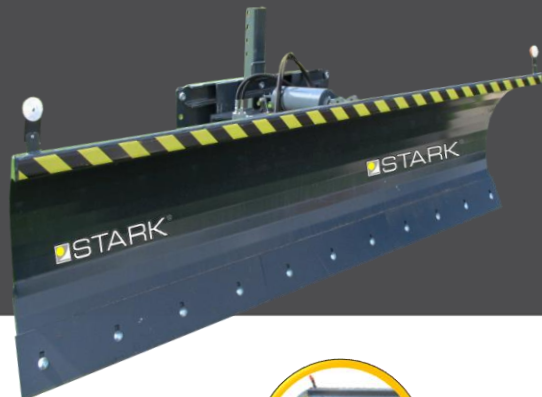

- Optional ADS spring trip device protects the operator, base machine and work tool
- Tilt angle of 12°
- Vertical flotation travel of 190 mm
- Advanced degree of flotation ensures an excellent plowing trace
- Good visibility increases occupational safety
- All STARK snow blades have a bolt-on STARK-fit fitting







- Accessories: blade options, LED series, snow rubber for the front edge of the wing, customized paint finish



REPARK
WWW.REPARK.LV



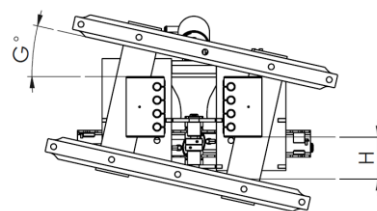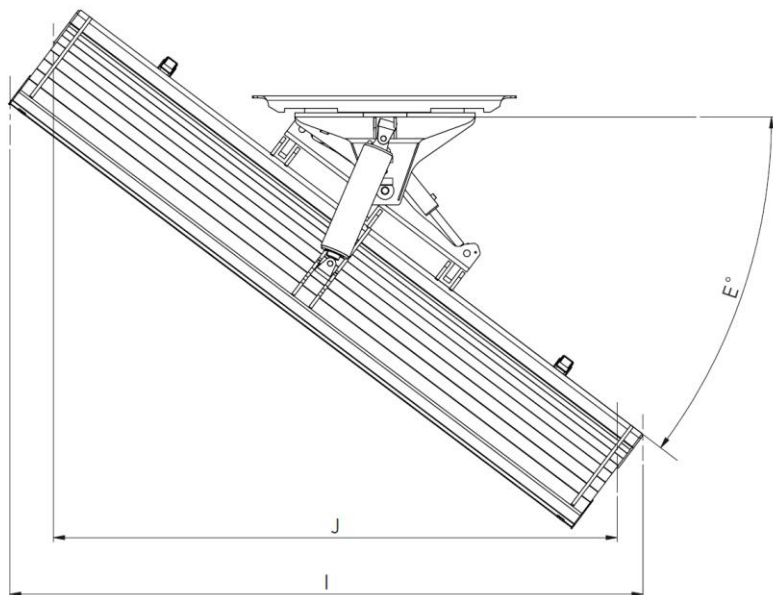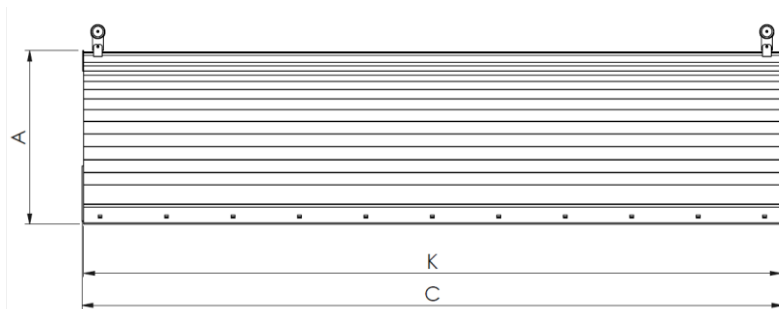

REPARK
WWW.REPARK.LV

Product	Wing max. height (mm)	Wing width (mm)	Distance from fitting (mm)	Turning angle $\pm$ (°)	Blade angle (°)	Flotation (°)	Flotation height (mm)	Min. working width with turning angle (mm)	Min. working width with turning angle (mm)	Blade length (mm)	Weight (kg) *
PL 2000 Lite	A	C	D	E	F	G	H	I	J	K	
PL 2000 Lite	640	2010	800	35	25	6	100	1870	1660	2010	400
PL 2200 Lite	640	2210	800	35	25	6	100	2020	1980	2440	460
PL 2500 Lite	790	2510	800	35	32	6	100	2370	2070	2530	520
PL 2800 Lite	790	2810	770	35	32	6	100	2580	2320	2840	570
PL 3000 Lite	790	3010	770	35	32	6	100	2720	2490	3050	620
PL 3200	790	3210	820	35	32	12	190	2890	2650	3240	650
PL 3600	790	3610	1100	38	32	12	190	3140	2880	3660	700

* Weight includes blades and fittings. Weight depends on the fitting/plow accessories