




# STARK®

**STRONG, STRONGER, STARK**



## STARK -DIAGONAL PLOW

- Professional's choice for plowing roads
- Strong structure and high quality components ensure trouble-free miles of plowing

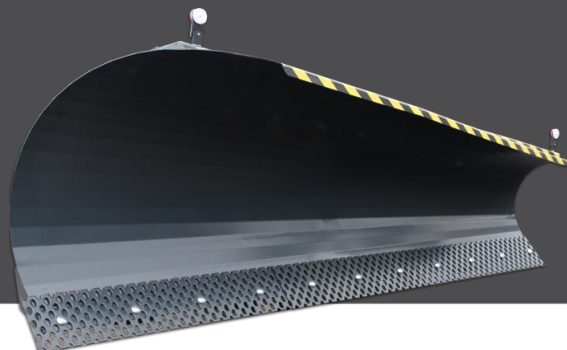


- Excellent snow throwing capabilities
- ADS spring trip device protects the operator, base machine and work tool
- Thanks to its advanced degree of flotation, the plow is smooth to push
- Tilt angle of 12°
- Vertical flotation travel of 190 mm
- All STARK diagonal plows have bolt-on STARK-fit fittings
- Steering angle of 38° (AL2800-AL4000)
- All STARK diagonal plows use standard blades







- Accessories: numerous blade options, LED series, rubber snow edge for the front of the wing, customized paint finish, hydraulically operated snow stopper



**REPARK**  
WWW.REPARK.LV



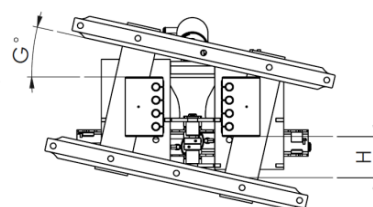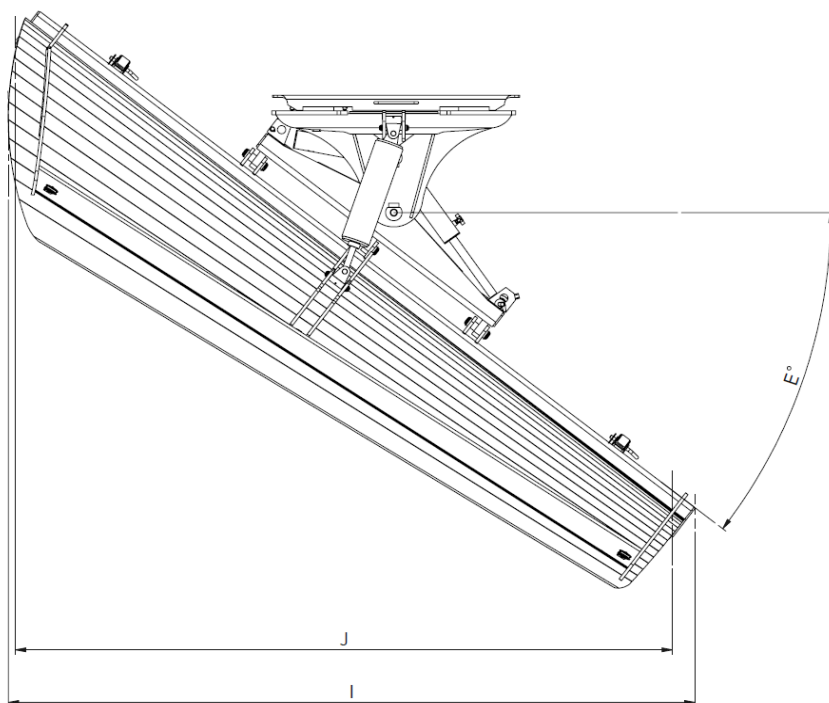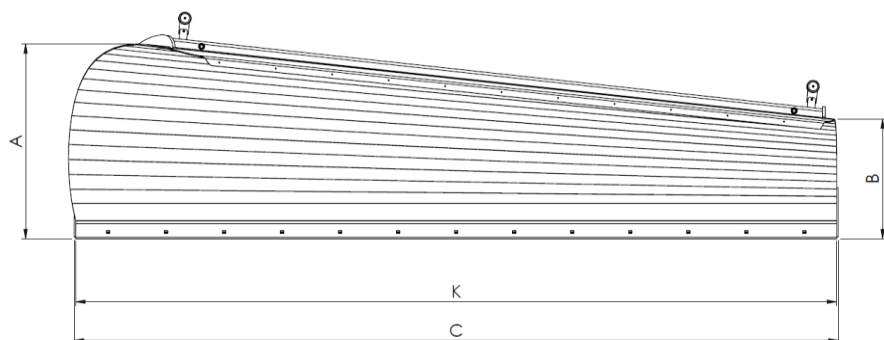

**REPARK**  
WWW.REPARK.LV

| Product      | Wing max. height (mm) | Wing min. height (mm) | Wing width (mm) | Distance from fitting (mm) | Turning angle $\pm$ (°) | Blade angle (°) | Flotation (°) | Flotation height (mm) | Min. width with turning angle (mm) | Min. working width with turning angle (mm) | Blade length (mm) | Weight (kg) * |
|--------------|-----------------------|-----------------------|-----------------|----------------------------|-------------------------|-----------------|---------------|-----------------------|------------------------------------|--------------------------------------------|-------------------|---------------|
|              | A                     | B                     | C               | D                          | E                       | F               | G             | H                     | I                                  | J                                          | K                 |               |
| AL 2000 Lite | 750                   | 500                   | 2040            | 750                        | 35                      | 28              | 6             | 100                   | 1750                               | 1640                                       | 2010              | 415           |
| AL 2400 Lite | 750                   | 500                   | 2430            | 750                        | 35                      | 28              | 6             | 100                   | 2060                               | 1960                                       | 2440              | 500           |
| AL 2800      | 1040                  | 680                   | 2850            | 810                        | 35                      | 32              | 12            | 190                   | 2410                               | 2290                                       | 2840              | 670           |
| AL 3000      | 1040                  | 670                   | 3040            | 790                        | 35                      | 32              | 12            | 190                   | 2610                               | 2490                                       | 3050              | 740           |
| AL 3200      | 1010                  | 650                   | 3260            | 790                        | 35                      | 32              | 12            | 190                   | 2800                               | 2640                                       | 3240              | 820           |
| AL 3600      | 1060                  | 660                   | 3650            | 1060                       | 38                      | 32              | 12            | 190                   | 3040                               | 2910                                       | 3660              | 960           |
| AL 4000      | 1070                  | 660                   | 4040            | 1060                       | 38                      | 32              | 12            | 190                   | 3350                               | 3220                                       | 4060              | 1000          |

\* Weight includes blades and fittings. Weight depends on the fitting/plow accessories