



60
kN



-50
kN



30
kN

-25
kN



1850
nm

37
kg

25
l/min

Hydraulic rotator FHR 6LD1/68 is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.

Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 68mm and the fixing pin (not included) diameter 30mm

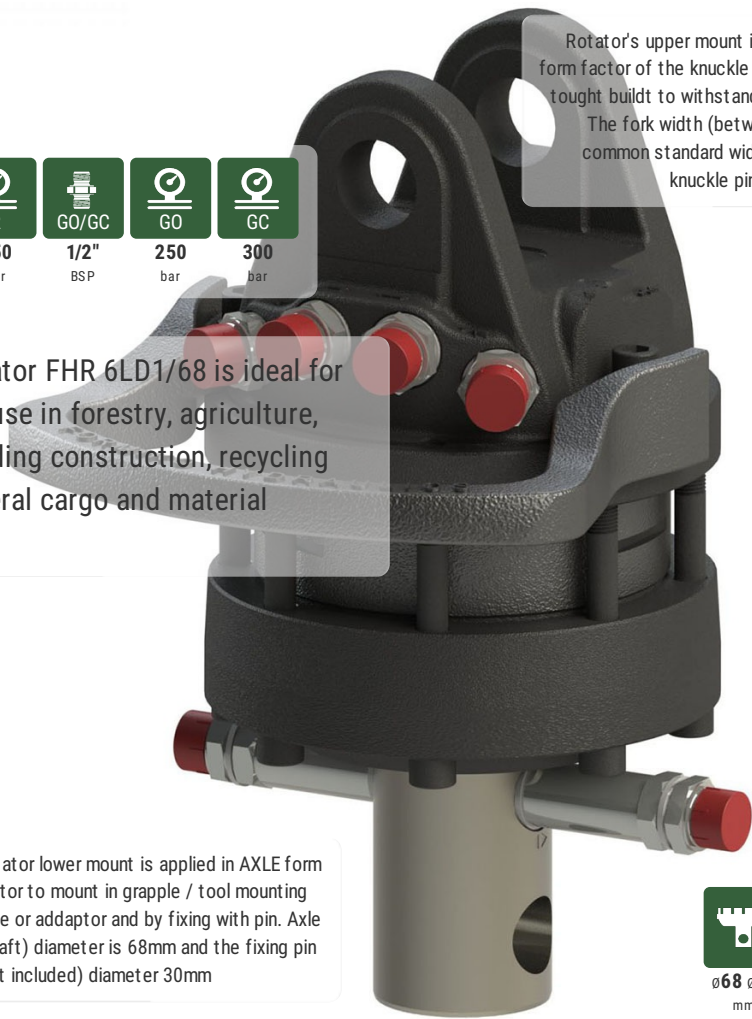

Rotator's upper mount is applied in FORK form factor of the knuckle joint. Robust and tough built to withstand even overloads. The fork width (between fork ends) is common standard width 80mm and the knuckle pin diameter 35mm.

