


# VPH 3-1500 Screening Bucket

VPH 3-1500 is a versatile high-quality screening bucket model that is suitable for various screening, processing, and also light crushing of different materials.

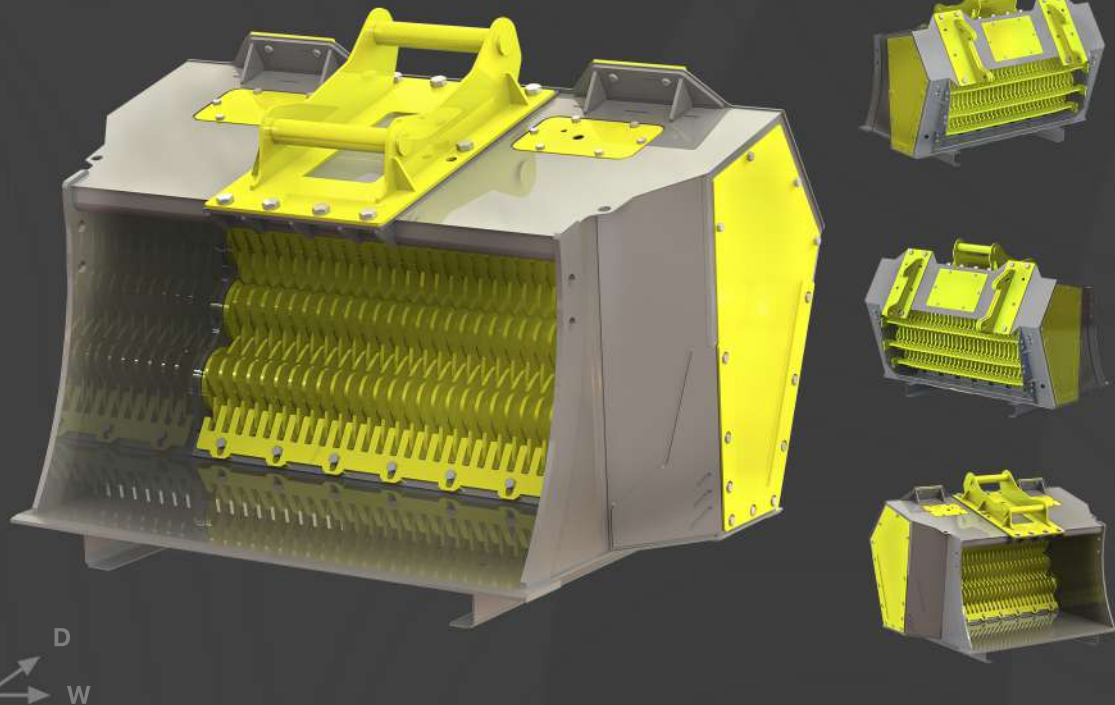

## Specifications

### Base Machine

Excavator: 10,000 - 15,000 kg  
(22,000 - 33,000 lbs)

Wheel loader: 7,000 - 10,000 kg  
(15,000 - 22,000 lbs)

### Flow Rate

Oil Flow min – max: 70 - 220 l /min  
(18 - 58 gal /min)

### Pressure

Oil Pressure: 210/250 bar (3,000/3,600 psi)

### Volume

ISO/SAE: 0,7 - 0,8 m<sup>3</sup> (0.92 - 1 yd<sup>3</sup>)  
Screen area: 1 m<sup>2</sup> (11 ft<sup>2</sup>)

### Dimensions

Height: 1000 mm (39.0 in)  
Width: 1720 mm (67 7/10 in)  
Depth: 1200 mm (47.0 in)

### Weight

Without accessories: 980 kg (2,200 lbs)

### Additional notes:

- Product Name: VP = Viper; H = Horizontal axles, V = Vertical axles; first number = number of axles, second number = axle length in mm.
- Base machine weight recommendations are suggestive. Check the suitable tipping load from the base machine user manual.
- Hydraulic flow values are indicative. Always verify the correct values for the application from the manufacturer.
- Product weight is based on a bucket without any additional equipment. Blade spacing and blade thickness may affect the weight.
- The oil pressure values are indicative. Always verify the correct values for the application from the manufacturer.
- Changes to document information without prior notice are reserved.