




NORDIC SCORPIUS LED N4403 QD


The Nordic SCORPIUS LED N4403 QD work lamp offers strong illumination and is equipped with the revolutionizing QUAKE dampening system. The new QUAKE dampening system takes protection against vibration and shock to a whole new level never seen before. Suitable for harsh conditions and a range of applications.

Light patterns


N4403 QD, N4404 3000lm
Wide Flood




N4403 QD, N4404 3000lm
Flood



N4403 QD, N4404 2400lm
Diffused



N4403 QD, N4404 3000lm
High Beam

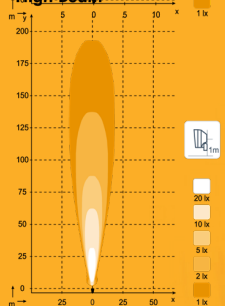

Nordic Lights™

Herrmans Oy Ab

P.O. Box 36, Bennäsvägen 143
FIN-68601 Jakobstad, FINLAND

Tel: +358 (0)6 781 5100

Fax: +358 (0)6 723 3160

E-mail: nordiclights@nordiclights.com

Web: www.nordiclights.com

VAT ID: FI17390930


NORDICLIGHTS



Features

	Long Lifetime		Low Maintenance		Waterproof
	Heavy Duty Construction		Reverse Voltage		EMC
	Load Dump Protected		Over Voltage Protected		Overheat Protected
	Salt Mist		Optically Even Light		Distinct Light Pattern
	Different Lens Colour		Replaceable Lens		High Light Output
	High Lumens / Watt		Multi Voltage		Compact
	Quake Dampening				

Drawings

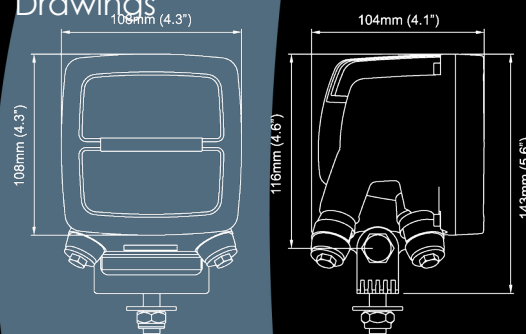

Specifications

Theoretical Lumens Output:	4800lm
Operational Lumens Output:	3000lm
Colour Temperature:	5700K
Nominal / Input Voltage DC:	12- 9-32V
Power Consumption:	45W
Nominal Current at:	24V 1.9A 12V 3.8A
Electronics:	Integrated
Connector:	Built-in Deutsch 2-pin
Mount:	Single Bolt M10
Shock:	60G
Vibration:	20Grms 24-2000Hz 4.65Grms 12-2000Hz
Lens:	PC
Optional Lens Colours:	Amber Red Transparent White Yellow
Body:	Aluminium
Weight:	1.6kg
IP Rating:	IP68 IP6K9K SAE J1455
Salt Mist:	ISO 9227 240H
EMC:	CISPR 25 Class 3 ISO 13766 ISO 14982 ISO 7637-2
Operating Temperatures:	-40°C... +85°C (Overheat protected)
Packing:	12 pce / Box